


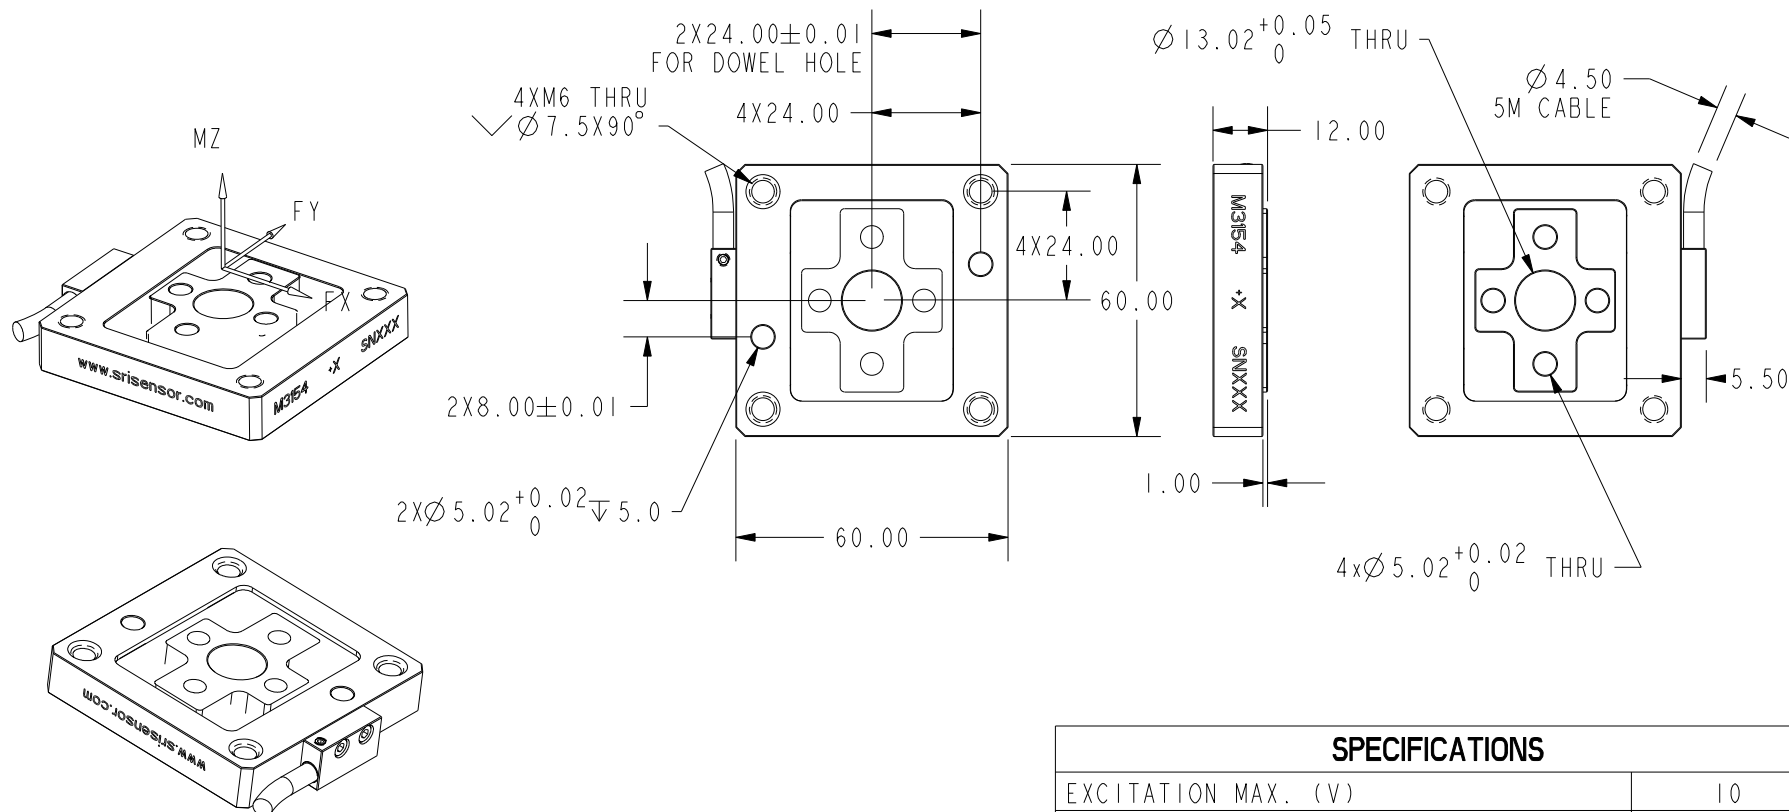

SPECIFICATIONS	
EXCITATION MAX. (V)	10
OVERLOAD CAPACITY (%F.S.)	150
CROSSTALK - NO ADJUSTMENT (%F.S.)	5
NON-LINEARITY (%F.S.)	1.0
HYSTERESIS (%F.S.)	1.0
OPERATING TEMP. RANGE (°C)	-40 TO +100
COMPENSATED TEMP. RANGE (°C)	10 TO 70
MASS (KG)	0.31

	Fx	Fy	Fz	Mx	My	Mz
CAPACITY (N)	17000	17000	17000	NA	NA	NA
OUTPUT (mV/V)	1.0	3.1	3.1	NA	NA	NA
BRIDGE RES. (Ω)	350	350	350	NA	NA	NA

WIRING CODE - TWISTED PAIR WIRES					
Fx		Fy		Fz	
COLOR	FUNCTION	COLOR	FUNCTION	COLOR	FUNCTION
RED(BLACK)	+EXC.	RED(BROWN)	+EXC.	ORANGE(BLACK)	+EXC.
BLACK(RED)	-EXC.	BROWN(RED)	-EXC.	BLACK(ORANGE)	-EXC.
YELLOW(BROWN)	+SIG.	BLUE(BROWN)	+SIG.	YELLOW(BLACK)	+SIG.
BROWN(YELLOW)	-SIG.	BROWN(BLUE)	-SIG.	BLACK(YELLOW)	-SIG.

SUNRISE INSTRUMENTS www.srisensor.com		
THREE AXIS FORCE LOAD CELL 17KN		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM	M3154B	REV. C